

N-120EL12
N-140EL12
N-160EL12

- Working height until 60ft 8 in (18.50 m)
- 16 ft x 3ft 10 in (4.88x1.16 m) extended platform
- Load capacity until 2,205 lb (1,000 kg)
- Security system with Pot Hole protection




N-120EL12
N-140EL12
N-160EL12

ELECTRIC SCISSOR LIFTS

The Haulotte® advantages

- 3ft 11 in (1.20 m) width allows operation in the most congested areas
- Patented scissor design, Pot Hole protection and a load control in the basket ensure maximum safety
- Scissor skirt
- Folding guardrails
- Easy access to batteries
- Robust, reliable and easy to maintain design

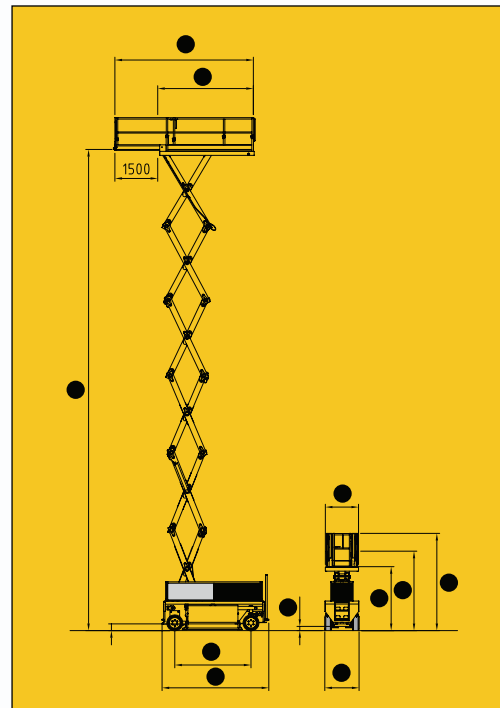

STANDARD FEATURES

- Inside use
- 2 front wheel drive and steer
- Non marking tyres
- Tilt alarm
- 2 drive speeds
- 3 ft 18 in (1.50 m) platform extension
- Control panel with fast disconnection
- Motion alarm
- Hourmeter
- Emergency lowering pull handle

OPTIONS

- 230 V power line from chassis to platform

SPECIFICATIONS

	N-120EL12	N-140EL12	N-160EL12
Working height	13,7m / 44 ft 11 in	16,0m / 52 ft 6 in	18,5m / 60 ft 8 in
A - Platform height	11,7m / 38 ft 5 in	14,0m / 45 ft 11 in	16,5m / 54 ft 2 in
Max. platform capacity	1000 kg / 2205 lb	750 kg / 1654 lb	500 kg / 1103 lb
L - Length	3,74m / 26 in x 27 in		
B - Width	1,2m / 3 ft 11 in		
- Height (guardrails)	2,96m / 9 ft 9 in	3,18m / 10 ft 5 in	3,4m / 11 ft 2in
- Transport height (folded guardrails)	2,34m / 7 ft 8 in	2,56m / 8 ft 5 in	2,78m / 9 ft 1in
G - Wheelbase	2,67m / 8 ft 9 in		
M - Ground clearance	23 cm / 9 in		
D x F - Platform size	3,38 x 1,16 m / 11 ft 1 in x 3 ft 10 in		
E x F - Platform extension	4,88 x 1,16 m / 16 ft x 3 ft 10 in		
Capacity on extension	1000 kg / 2205 lb	750 kg / 1654 lb	500 kg / 1103 lb
Drive speed	from 0,5 to 2 km/h / from 0,3 mph to 1,2 mph		
Outside turning radius	3,92m / 12 ft 10 in		
Raise / lower speed	65 / 40 sec	70 / 45 sec	80 / 50 sec
Max. gradeability	25%		
Foam filled tyres	non marking		
Batteries	420 Ah / k5 / 48 V		
Weight	7000 kg / 15435 lb	7550 kg / 16648 lb	7985 kg / 17607 lb



HAULOTTE UK LTD • STAFFORD PARK 6 • TELFORD - SHROPSHIRE TF3 3AT • TEL :+44 (0)1952 292753 • FAX :+44 (0)1952 292758 • E.mail :haulotte@haulotte.co.uk
 HAULOTTE SCANDINAVIA AB • ARÖDS INDUSTRIVÄG 66 B • 422 43 HISINGS BACKA - SWEDEN • TEL :+46 31 744 32 90 • FAX :+46 31 744 32 99 • E-mail :hwallin@haulotte.se • www.haulotte.se
 HAULOTTE AUSTRALIA PTY LTD • 65 LICOLA CRES • DANDENONG - VIC - 3175 • TEL :+61 (0)3 9706 6787 • FAX :+61 (0)3 9706 6797 • E.mail :sales@haulotte.com.au
 HAULOTTE SINGAPORE PTE.LTD • 26 Changi North Road Way • SINGAPORE 498812 • TEL:+65 6536 3989 • FAX:+65 6536 3969 • E-mail:haulotteasia@haulotte.com



Haulotte Group - La Péronnière - BP 9 -42152 l'Horme - France
 Tél : +33 (0)4 77 29 24 24 - Fax : +33 (0)4 77 29 43 95 - E-mail : haulotte@haulotte.com - www.haulotte.com

2420330180 - Products specifications are subject to change without notice - non contractual document.